




TRI-CELL™ MIF

MEDIUM AND HIGH EFFICIENCY MACHINE INTAKE FILTRATION

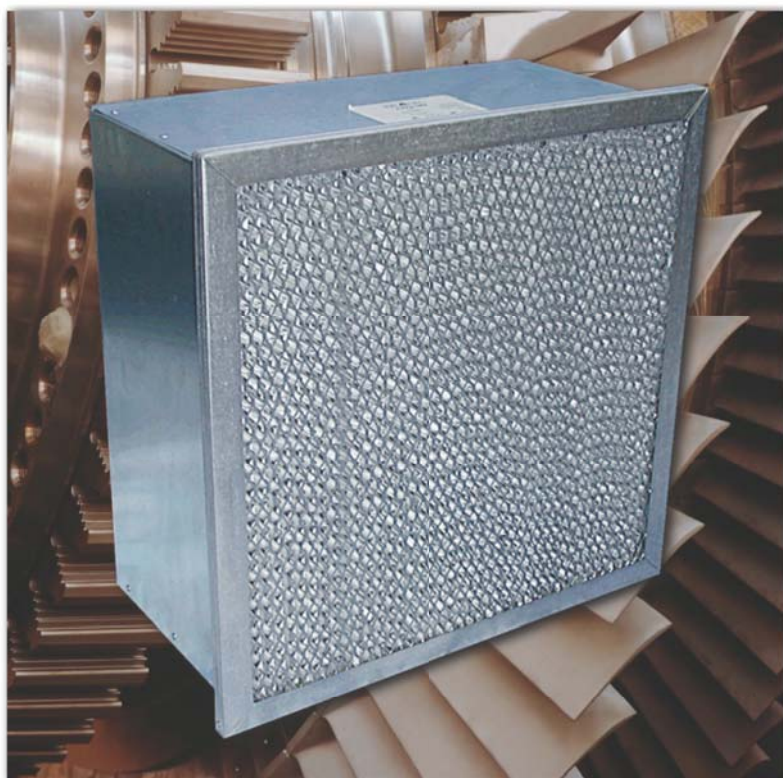


TRI-CELL MIF - Machinery Intake Filters are specifically engineered for the rotating machinery industry - centrifugal compressors, gas turbines and engines - where severe pulsing and surging can occur, in either airflow direction. The TRI-CELL MIF is designed to withstand these harsh conditions and offer high efficiency and high dust holding capacity.

The TRI-CELL MIF is available in MERV 11 (60-65%) and MERV 14 (90-95%) efficiencies and in either single header (*see photo left*) or double header configurations. The TRI-CELL MIF is constructed with protective faceguards both upstream and downstream and a cross brace located downstream.

The media is constructed of glass microfibers that are configured to maximize service life. The TRI-CELL MIF media is water resistant and can endure intermittent exposure to water with only a temporary rise in resistance. The TRI-CELL MIF media pack also features aluminum separators that have been rolled and tapered and placed between each pleat to enhance stability and to insure maximum airflow at a minimal resistance. The media pack is sealed to the frame around the perimeter with an adhesive sealant to create a positive seal and eliminate the bypass of unfiltered air.

The TRI-CELL MIF is the filter for use in the demanding environments of centrifugal compressors and gas turbines.

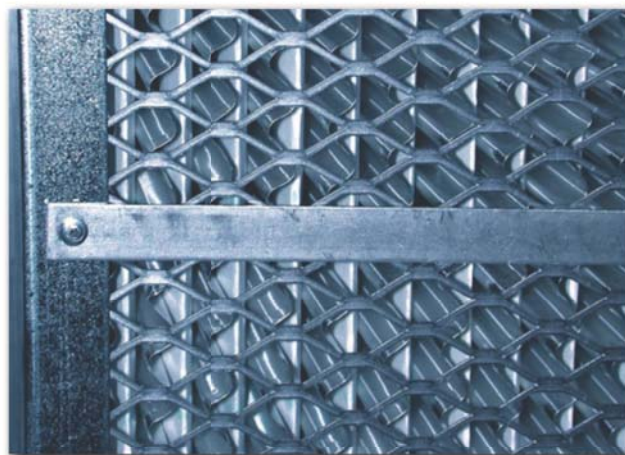

Cross Brace and Faceguard

TRI-CELL MIF SPECIFICATIONS



Media

Glass Microfiber

Frame Construction

Galvanized Steel

Seal

Perimeter Adhesive Seal

Faceguards

Upstream and Downstream Standard

Cross Brace

Downstream Standard

Efficiency and Initial Resistance @ 500 FPM (2.54 m/sec)

MERV 11 (60-65%)

0.40" WG (100 PA)

MERV 14 (90-95%)

0.61" WG (152 PA)

Recommended Final Resistance

2.5" WG (622 PA)

Options

Factory Installed Gasketing
Cross Brace Upstream

Meets ANSI/UL-900 Requirements

Tri-Dim Filter Corporation is committed to continual product development – all descriptions, specifications and performance data are subject to change without notice. Tri-Dim products are manufactured to exacting criteria - there can be a $\pm 5\%$ variance in filter performance. Tri-Dim® and Tri-Dek® are Registered Trademarks of Tri-Dim Filter Corporation. Tri-Pleat™ is a Trademark of Tri-Dim Filter Corporation.



TRI-DIM FILTER CORPORATION
P.O. BOX 466 • 93 INDUSTRIAL DRIVE
LOUISA, VA 23093
(540) 967-2600 • FAX: (540) 967-2835

EMAIL: info@tridim.com • Website: www.tridim.com
TOLL FREE 1-800-458-9835



Local Representation:

Brochure # 1200-2
Revision: 08/2011



PLEASE RECYCLE - This paper may not be recyclable in your area if facilities do not exist. This brochure is printed on paper that is certified by the Sustainable Forestry Initiative (SFI) - for more information go to www.sfi.org.

